

PRODUCT DATA SHEET

110 0031 & 0032


0031—24 SYNCHRONOUS

0032— 24 HOUR QUARTZ

DIN RAIL MOUNTING



VOLT FREE CHANGEOVER CONTACTS

16 (2) AMPERE CONTACT RATING

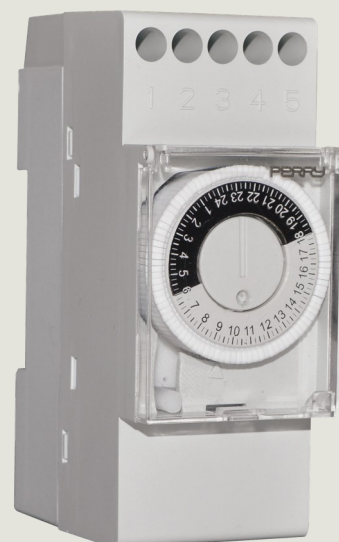

The Perry Electric 0031 & 0032 time switches are Din-rail mounted two-module mechanical timers, with 24 hour programming, featuring mechanical tappet-style programming. The timers operate a volt-free changeover contact, rated at 16 amperes resistive, 2 amperes inductive. 0031 is a synchronous device without running reserve. 0032 is a quartz timer, with a rechargeable 150 hour running reserve.

DIMENSIONS	35 x 60 x 90 (see drawing below)
CONNECTIONS	5 X WIRE-PROTECT CAPTIVE SCREW TERMINALS
WEIGHT	110g
RESISTIVE (INDUCTIVE) LOAD	16 (2) AMPERES
TEMPERATURE RATING	T50
MINIMUM SWITCHING	15 minutes
MANUAL OVERRIDE	TIMED / FIXED OFF
BATTERY BACK-UP	150 HOUR RECHARGEABLE CELL (model 0032)
PROTECTION RATING	IP 30

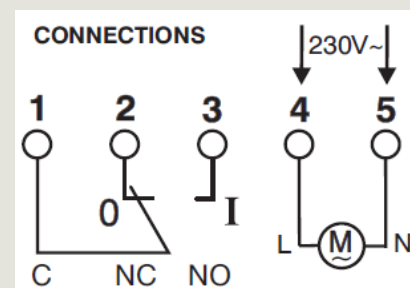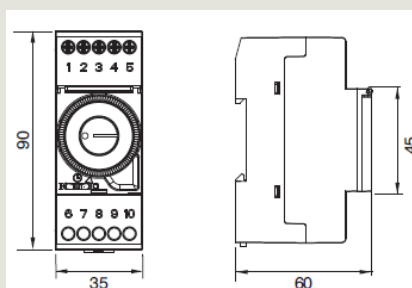

EXCLUSIVELY BY

